



Small QTH. Big Directivity

Optimized differential RX 4SQ array

21x21m footprint for 160/80m with RDF 12.29dB


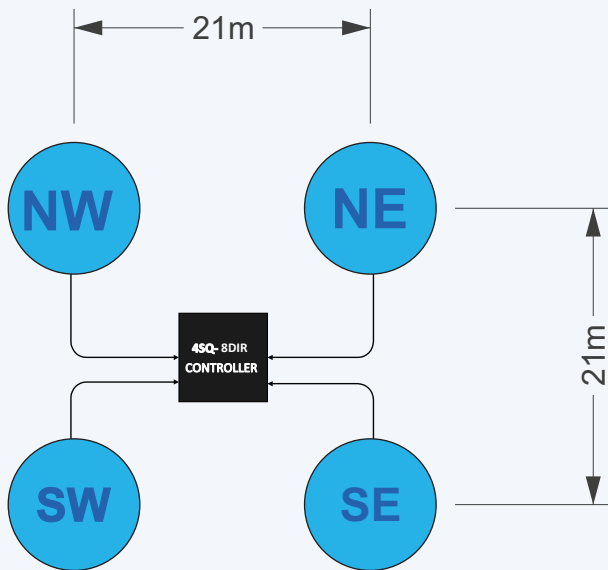


21x21m footprint for 160m/80m with RDF 12.29dB

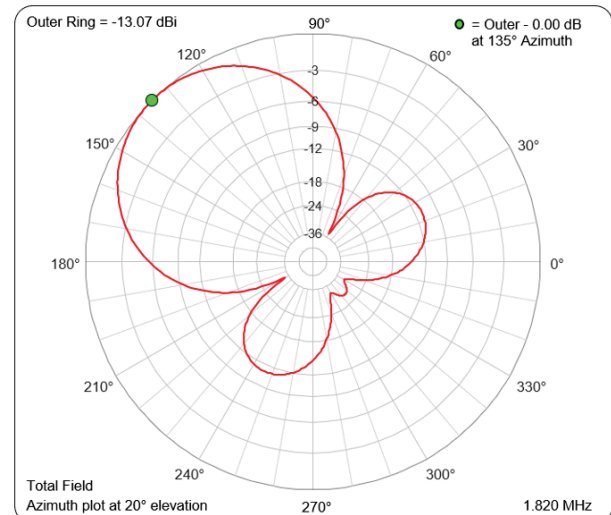

BSEF for major DX bearing on 160 or 80m

Broad side end-fire 10 x 52m on 80m RDF 13.27 dB

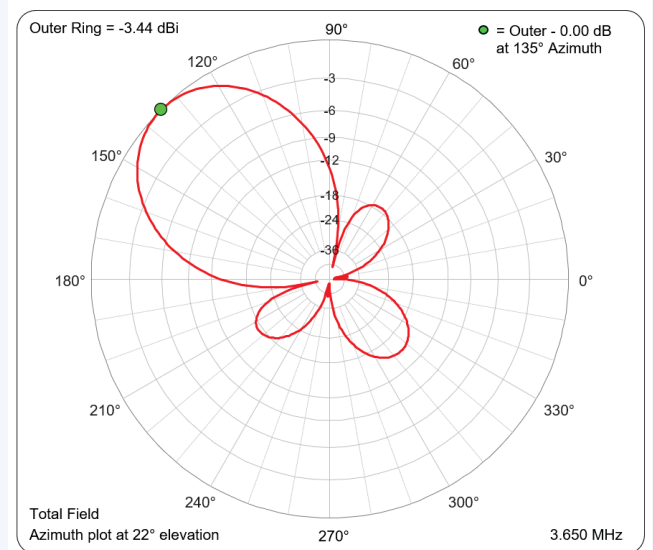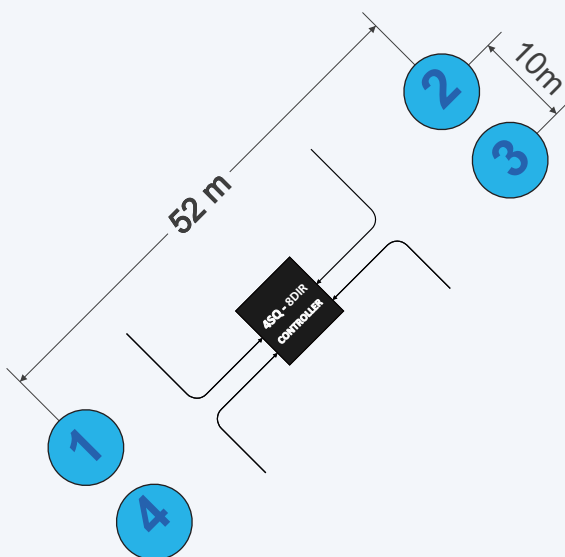

Twisted Wireless

Pioneering Twisted World

info@twistedwireless.com

Silence the Noise


Amplify the DX

Design dedicated to **common-noise reduction**

Twisted pairs = Native common-mode noise rejection

Single FTP cable: RF, DC, and 8-direction control up to 300 m

No external ferrite-based common-mode noise baluns required

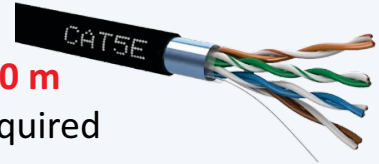

Eight directions to fill gaps between diagonal headings (4diagonal + 4perpendicular)

Ready for 160 m or 80 m reversible BSEF array



Two-wire RS-485 architecture: Enables stackable, efficient system integration

Integrated **MicroHAM ARXC** module (RS-485)

Compatible with MicroHAM **ARCO/TRIO** with **VNC remote operation**

Differential transimpedance LNA with 6 m high mini-verticals - **no radials needed**

Transimpedance LNA with **separate RX** and **separate DC paths**

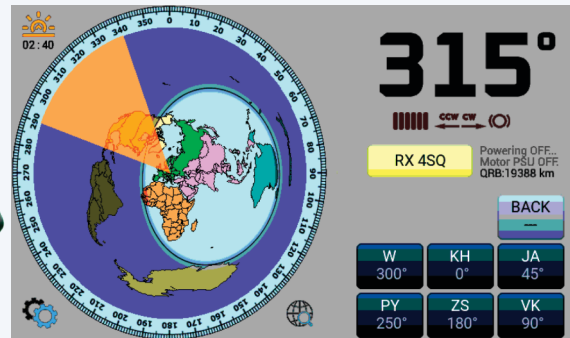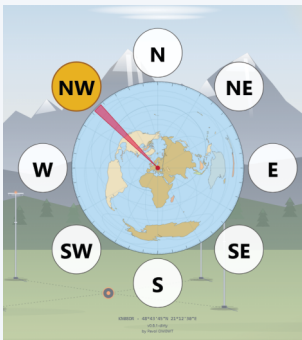

Microprocessor-based **switching console** with **Bluetooth+WI-FI+RS-485** interface

Pair your tablet with our advanced switching hardware

Optimize your remote station with our dedicated switching system

Precise QTH heading control and a wide range of advanced capabilities

Complete Bundle

2249 € (VAT included)



Twisted Wireless

Pioneering Twisted World

info@twistedwireless.com